


Adjustable Thermostat TS-Series

Rainbow

Ver 1.0

Key Features

- ⊙ An adjustable thermostat that controls the temperature of the installed device.
- ⊙ An auto-adjusting device where temperatures fluctuates within a set range.
- ⊙ Customization can be accommodated to meet customer requirements, i.e., temp range, bulb dimension, terminal shape.
- ⊙ UL, CE, TUV, KC, RoHS Certification / Compliance with REACH
- ⊙ Used in various applications
 - Commercial Cooking Equipments
 - Boilers, Water Heaters
 - Heating & Cooling Equipments
 - Industrial & Laboratory Facilities


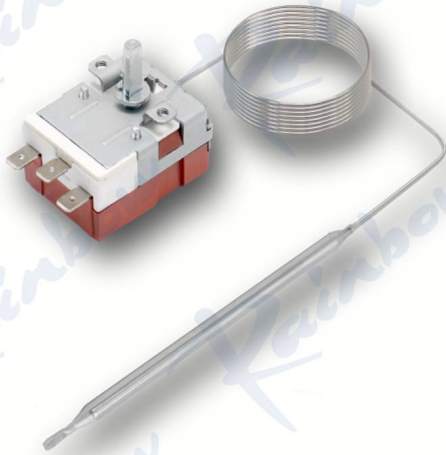


Specification



Model	Temp Range	Ratings	Bulb Dimension	Switch Action	Accuracy	DIFF.	Specification
TS-030S	-30~30°C	20A/250V	∅5.8 X 127mm	SPST/SPDT	±2°C	4±2°C	Temp Range : -30°C to 320°C Bulb & Capillary : Stainless Steel or Copper Capillary Tube : 1,000 mm (250 to 2,000 mm) Terminal : Straight, 45°angle, 90°angle Assembly Distance : 28mm Dial (Knob) : R KNOB or B KNOB Plug : PT1/4", M12, M14
TS-050S	0~50°C	20A/250V	∅5.8 X 127mm	SPST/SPDT	±2°C	2±1°C	
TS-080S	0~80°C	20A/250V	∅5.8 X 121mm	SPST/SPDT	±3°C	2±1°C	
TS-090S	0~90°C	20A/250V	∅5.8 X 123mm	SPST/SPDT	±3°C	3±1°C	
TS-120S	0~120°C	20A/250V	∅5.0 X 106mm	SPST/SPDT	±3°C	3±1.5°C	
TS-200S	50~200°C	20A/250V	∅5.0 X 89mm	SPST/SPDT	±8°C	6±3°C	
TS-320S	50~320°C	20A/250V	∅5.0 X 60mm	SPST/SPDT	±11°C	7±4°C	
TS-320S	50~320°C	20A/250V	∅3.0 X 144mm	SPST/SPDT	±11°C	7±4°C	

Drawing

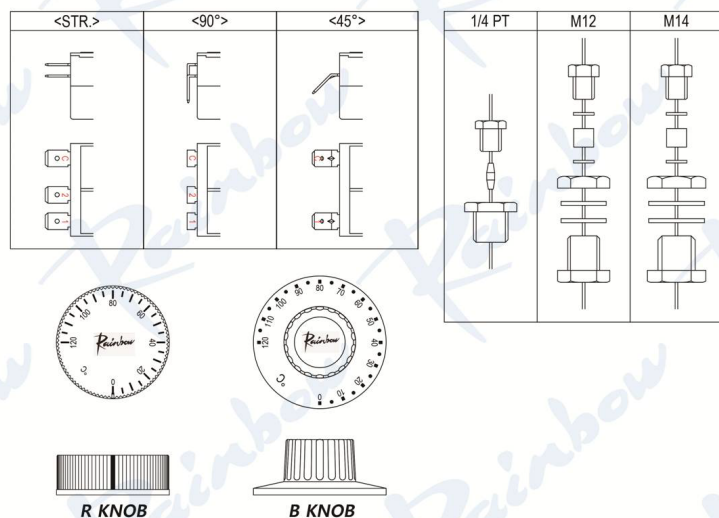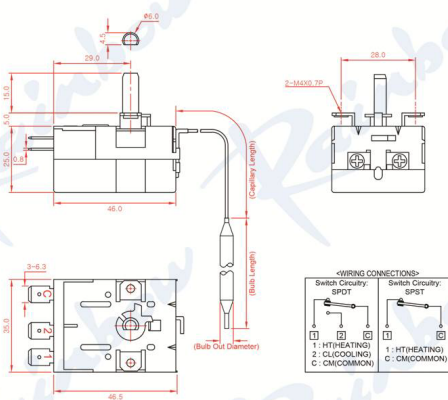

HEAD OFFICE & FACTORY
 (주)레인보 / RAINBOW ELECTRONICS CO.,LTD.
 303-204, 397, Seokcheon-ro, Bucheon-si, KOREA
 TEL : 82-32-624-2288 / FAX : 82-32-624-2299

CHINA OFFICE & FACTORY
 青岛来仁宝电子有限公司 / QINGDAO RAINBOW
 18, Huanghe Road, Laixi, Qingdao, CHINA
 TEL : 86-0532-8849-3930 / FAX : 86-0532-8849-3932