





雅利實業有限公司

ARLIH INDUSTRIAL CO., LTD.


Current Transformer - AL Type

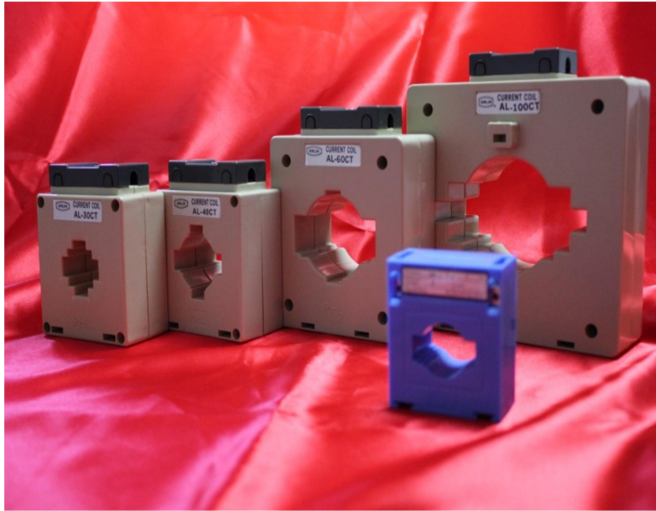


AL - 23

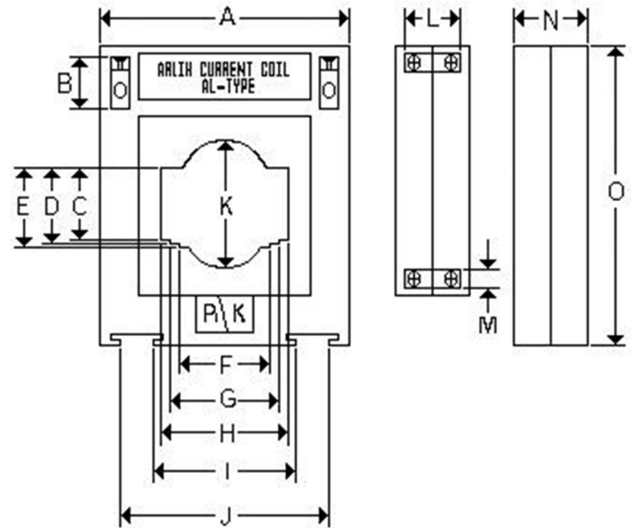

AL - 30

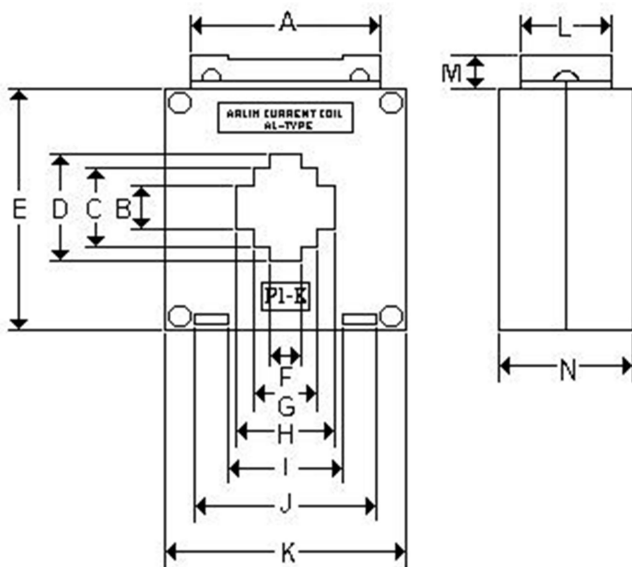

AL - 40

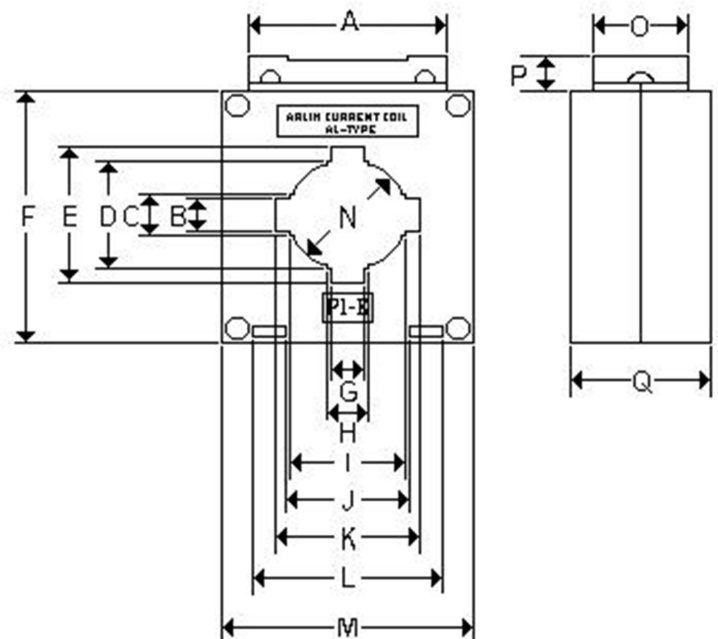





雅利實業有限公司
ARLIH INDUSTRIAL CO., LTD.

Current Transformer - AL Type

AL - 60

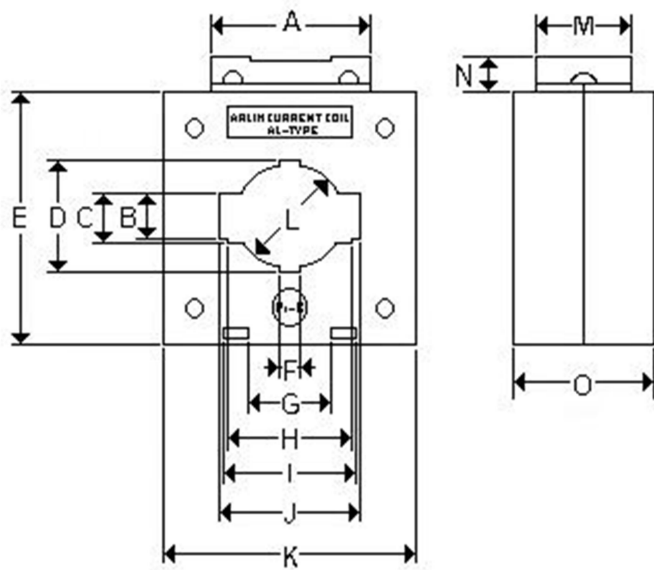

AL - 100

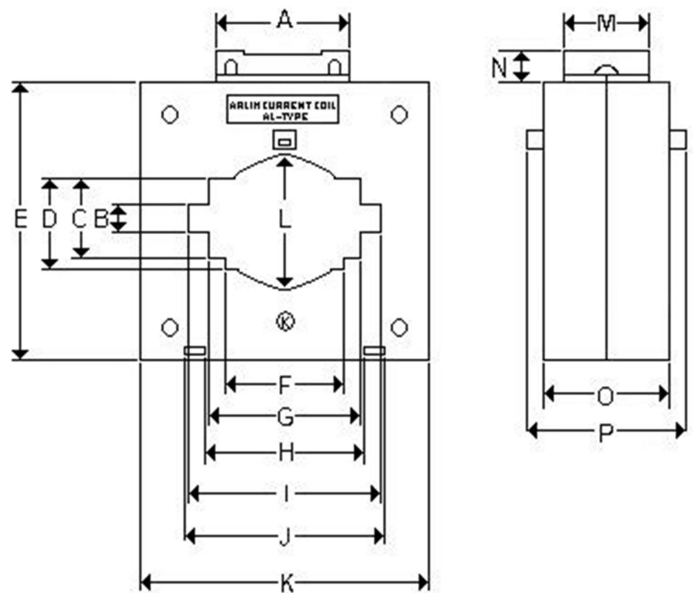

單位：公厘 (MM)

型 式	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
AL-23	56	13	11	12	13	21	26	31	32.5	46.5	23	22.5	5	29	63.5		
AL-30	60	10	20	30	82	10	20	30	35	56	75	32	17	43			
AL-40	60	10	13	30.5	40	82	10	13	30.5	35.5	75	56.5	75	30	32	17	43
AL-60	60	20	22	50	111	10	31	51	52	60	101	45	32	17	45		
AL-100	60	10	30	35	139	60	80	70	100	91	145	60	32	17	45	65.5	


型 式	一次電流	二次電流	額定負擔	額定電壓	週波數	準確階段
AL-23	100A-500A	5A	3VA	600V	50/60HZ	1
AL-30	50A-500A	5A	5VA	600V	50/60HZ	1
AL-40	100A-500A	5A	5VA	600V	50/60HZ	1
AL-60	400A-800A	5A	10VA	600V	50/60HZ	1
AL-100	800A-5000A	5A	15VA	600V	50/60HZ	1



雅利實業有限公司

ARLIH INDUSTRIAL CO., LTD.

Current Transformer - SL Type

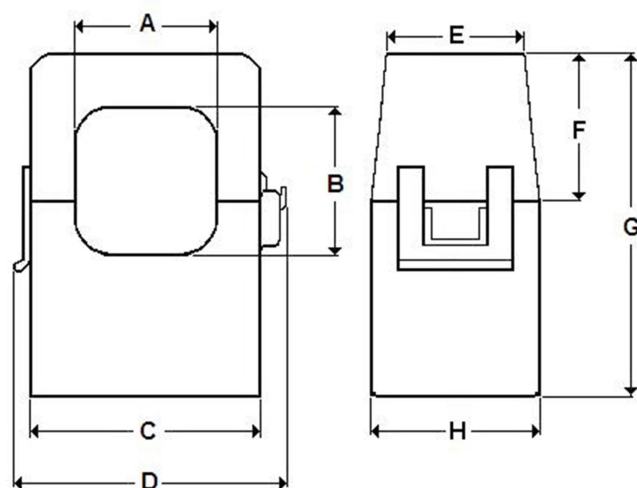

單位：公厘 (MM)								
型 式	A	B	C	D	E	F	G	H
SL-24	24	25	46	50.5	29	22.5	67	34.5
SL-36	36	37	57.5	68.5	34	36.5	86	42.5
SL-50	50	51	80.5	96	48	50.5	120	60


型 式	一次電流	二次電流	額定負擔	額定電壓	週波數	準確階段
SL-24	100A	5A	1VA	600V	50/60HZ	2
	150A ~ 300A	5A	1~2.5VA	600V	50/60HZ	1
SL-36	100A	5A	1VA	600V	50/60HZ	2
	200A ~ 600A	5A	2~12.5VA	600V	50/60HZ	1
SL-50	400A ~ 1000A	5A	5~15VA	600V	50/60HZ	1



雅利實業有限公司

ARLIH INDUSTRIAL CO., LTD.

Current Transformer - CL Type

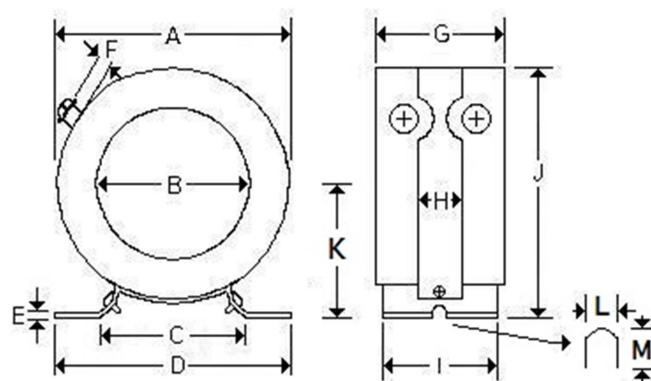

單位：公厘 (MM)

型 式	A	B	C	D	E	F	G	H	I	J	K	L	M
CL-25	65	31	55	75	1.2	11	30	13	28	75	42	6.8	11
CL-32	78	35	70	90	2	13	53.5	25	45	92	53	9	11
CL-58	102	56	69	103	2	13	54.5	25	45	115	64	9	19
CL-90	137	90	69	103	2	13	55.5	25	45	151	82	9	19
CL-110	151	110	69	103	2	13	55.5	25	45	167	91	9	19
CL-130	183	128	69	103	2	13	60	25	45	199	107	9	19


型 式	一次電流	二次電流	額定負擔	額定電壓	週波數	準確階段
CL-25	10A~500A	5A	3VA	600V	50/60HZ	1
CL-32	10A~600A	5A	15VA	600V	50/60HZ	1
CL-58	400A~1200A	5A	15VA	600V	50/60HZ	1
CL-90	800A~2000A	5A	15VA	600V	50/60HZ	1
CL-110	1000A~3000A	5A	15VA	600V	50/60HZ	1
CL-130	2000A~5000A	5A	15VA	600V	50/60HZ	1



雅利實業有限公司

ARLIH INDUSTRIAL CO., LTD.

Current Transformer - CH Type

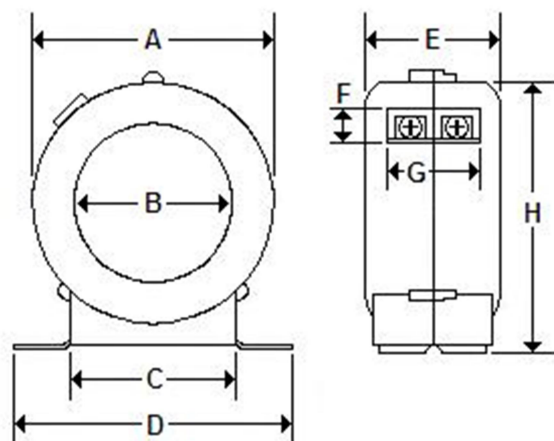

單位：公厘 (MM)								
型 式	A	B	C	D	E	F	G	H
CH-29	75	29	52	98	53.5	21	32	83
CH-39	82	39	54	98	53.5	21	32	91
CH-61	102	60	70	120	53.5	21	32	113
CH-85	121	85	90	140	53.5	21	32	130
CH-105	141	105	97	147	53.5	21	32	148

型 式	一次電流	二次電流	額定負擔	額定電壓	週波數	準確階段
CH-29	10A~500A	5A	2.5-15VA	600V	50/60HZ	1
CH-39	200A~600A	5A	5-15VA	600V	50/60HZ	1
CH-61	400A~1000A	5A	5-15VA	600V	50/60HZ	1
CH-85	800A~1200A	5A	15VA	600V	50/60HZ	1
CH-105	800A~5000A	5A	15VA	600V	50/60HZ	1